


Yamato®

For Stress-free Hemming Operation...

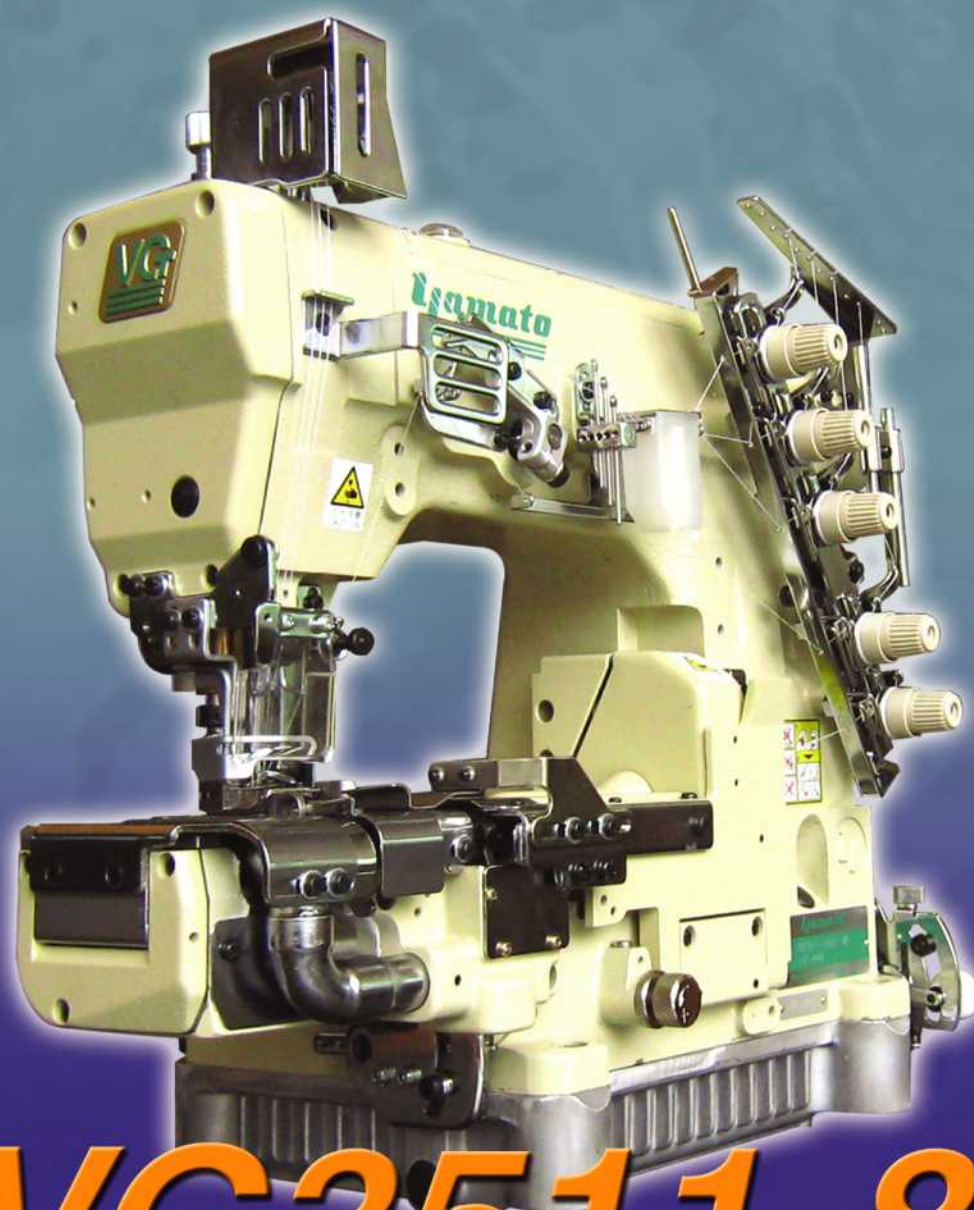

VG3511-8

Cylinderbed Interlock Stitch Machine for Hemming
with Left-Hand Fabric Trimmer and "Active Thread Control"



ISO9001:2008
JQA-QM6412

VG3511-8

Cylinderbed Interlock Stitch Machine for Hemming,
with Left-hand Fabric Trimmer and Active Thread Control

Numbering of Model

VG3511-156S1-8F/UT-A44

① ② ③ ④ ⑤

- ① Model Name
- ② Needle Distance - 132:3.2mm, 140:4mm, 148:4.8mm, 156:5.6mm 164:6.4mm
- ③ Stitch Plate Stitch Tongue Shape ④ with Active Thread Control
- ⑤ Devices

UT-A44 : Air-operated Automatic Thread Trimmer, with Airblow for Cut Waste Collection

UTL-A44 : Same as Above, but with Anti-unravelling Function

ST2-A : Air-operated Automatic Top Cover Thread Trimmer

CS : Air-operated Stitch Condense Device

UN3 : Uncurler

UT-4 : Solenoid Type Automatic Thread Trimmer

ST2 : Solenoid Type Automatic Top Cover Thread Trimmer

Specifications

Seam							
	UY128GAS 2/3	3/4/5	3.2 4.0 4.8 5.6 6.4	1.4 - 3.6	1:0.8 (1.1)~ 1:1.4 (2.0)	7~8.5	5500

Specifications and appearance on this catalogue are subject to change without notice.
For correct handling of products described on this catalogue, please read instructions carefully before operation.



YAMATO SEWING MACHINE MFG. CO., LTD.
<http://www.yamato-sewing.com>

HEAD OFFICE

4-12, 4-CHOME, NISHI-TENMA, KITA-KU, OSAKA, 530-0047, JAPAN
TEL: +81-6-6364-5621 / FAX: +81-6-6364-7185 / E-mail: export-dept@yamato-sewing.com

YAMATO U.S.A. INC.

TEL: +1-803-548-0334 / FAX: +1-803-548-0405

YAMATO EUROPE GmbH.

TEL: +49-40-355347-0 / FAX: +49-40-354371 / E-mail: sales@yamato.de

YAMATO (HONG KONG) CO., LTD.

TEL: +852-2721-0251 / FAX: +852-2723-0444 / E-mail: yamato@yamato-sewing.com.hk

雅满桃(香港)有限公司 东莞代表处

TEL: +86-769-86231363 / FAX: +86-769-86231362

大和缝纫机(宁波)有限公司

TEL: +86-574-86800518, 86800558 / FAX: +86-574-86800555 / E-mail: marketing@yamato-sewing.com.cn

大和缝纫机制造株式会社 青岛事务所

TEL: +86-532-85783175 / FAX: +86-532-85783172

大和缝纫机制造株式会社 上海事务所

TEL: +86-21-64400017, 64400019 / FAX: +86-21-64400021

YAMATO SINGAPORE PTE LTD.

TEL: +65-6287-1955 / FAX: +65-6287-1028 / E-mail: sales@yamato-sewing.com.sg

M/S. YAMATO SINGAPORE PTE LTD., INDIA LIAISON OFFICE (TIRUPUR BRANCH) TEL: +91-421-4333701 / FAX: +91-421-4333702 / E-mail: yamato-sewing@airtelbroadband.in

M/S. YAMATO SINGAPORE PTE LTD., INDIA LIAISON OFFICE (DELHI BRANCH) TEL: +91-11-41603280 / FAX: +91-11-40574681

YAMATO SINGAPORE PTE LTD., CUSTOMER SERVICE CORRESPONDENT IN JAKARTA, INDONESIA FAX: +62-21-781-8727

YAMATO SINGAPORE PTE LTD., BANGLADESH LIAISON OFFICE TEL: +88-02-871-4581, 871-4579 / FAX: +88-02-871-4579

YAMATO MEXICO OFFICE

TEL: +52-55-5764-9090 / FAX: +52-55-5578-1470

THE RESIDENT REPRESENTATIVE OFFICE OF YAMATO SEWING MACHINE MFG. CO., LTD IN HO CHI MINH CITY TEL: +84-8-62966057 / FAX: +84-8-38113384

VG3511-8

*Cylinderbed Interlock Stitch Machine for Hemming,
with Left-hand Fabric Trimmer and Active Thread Control*

■ Stress-free Handling, Material Saving and Easy "Stitch on Stitch" Overlap!

Fabric Guides and Fabric Trimmer Mechanism



Uniquely designed fabric guides and downsized fabric trimmer enables stress-free handling while holding down trimming margin.


Also, for circular work, "stitch on stitch" overlapping can be done without removing the edge from the guide or, even paying any attention on alignment.




■ From Fleece to Microfiber...

Active Thread Control

Epoch-making "Active Thread Control" help you being flexible for any sewing conditions from neatly tightened seam for standard knits, to highly elastic soft seam for recent underwear and sportswear.

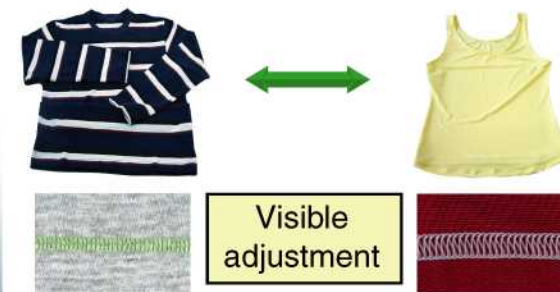

Incredible Stretch!!

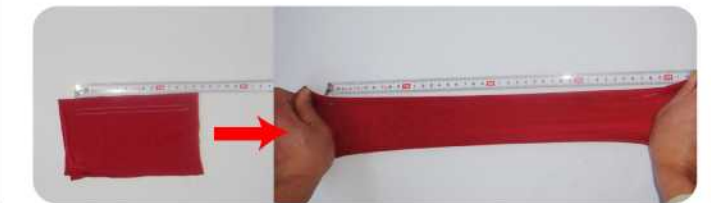

■ No worry about oil stain!

"Non-stain" Technology

Stable minimal lubrication, unique sealing technology, and forcible circular lubrication ensures stain-free finish, without sacrificing machine's performance.



■ Furthermore...!

Various User-friendly Features

External looper thread tak-up cam for easy adjustment and minimized downtime



Easy switch-over of needle bar stroke from 31mm to 33 and vice versa.

Set-in Style Handwheel for minimized risk for trouble.

